

ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D. C. 20231

Sir:

Transmitted herewith for filing is a patent application of

Inventor: Carl W. Shonk

For: A METHOD OF TRIGGERING THE TRANSMISSION OF DATA FROM A MOBILE ASSET

Enclosed are:

- ☒ 2 sheets of drawings.  
☒ An Assignment of the invention to Magellan DIS, Inc.  
☐ A certified copy of a \_\_\_\_\_ application.  
☒ A Combined Declaration and Power of Attorney  
☐ An associate power of attorney.  
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.  
☒ PTO Form 1449 with copies of patents cited in specification.

The filing fee has been calculated as shown below:

	No. Filed	No. Extra	Small Entity		Large Entity	
Basic Fee				\$345		\$690.00
Total Claims	22	2	X9	-0-	X18	36.00
Indep. Claims	3	0	X39	-0-	X78	-0-
Multiple Depend. Claim(s) Present			\$130	-0-	\$260	-0-

Total \$ Total \$726.00

- ☐ Please charge my Deposit Account No. 08-2789 in the amount of \$ \_\_\_\_  
A duplicate copy of this sheet is enclosed.


☒ A check in the amount of \$726.00 to cover the filing fee is enclosed. Also enclosed is a check in the amount of \$40.00 to cover the recordation filing fee.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 08-2789.

- ☒ Any additional filing fees required under 37 CFR 1.16.  
☒ Any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,

Howard &amp; Howard Attorneys, P.C.

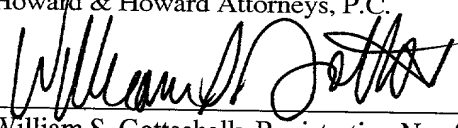  
William S. Gottschalk, Registration No. 44,130  
The Pinehurst Office Center, Suite 101  
39400 North Woodward Avenue  
Bloomfield Hills, MI 48304-5151  
(248) 645-1483

Please send correspondence to:

[illegible]

Rhonda K. von Schmid

dc856 U.S. PRO  
09/598538



06/21/00

**A METHOD OF TRIGGERING THE TRANSMISSION OF DATA**  
**FROM A MOBILE ASSET**

EL573273304US

**BACKGROUND OF THE INVENTION**

5       The present invention relates generally to vehicle positioning systems and more particularly to a method of triggering the vehicle positioning system to transmit the vehicle location to a remote location.

Several types of known vehicle positioning systems transmit the position of a remote vehicle to another location. For example, an emergency assistance request system on a vehicle  
10       transmits the location of the vehicle to an emergency assistance dispatch station along with a request for assistance. As another example, vehicle positioning systems are installed on fleets of vehicles so that their location and progress can be tracked from a central location.

These known systems use Global Positioning System (GPS) position solutions, generally in conjunction with other sensors, to obtain an estimated position. This solution is  
15       generally in terms of a standard navigational reference frame, for example WGS-84 (World Geodetic System - latitude and longitude), earth-centered-earth-fixed (ECEF). Many such coordinate systems or reference frames have been developed and are used by the military and by civilians for navigation and more generally to describe a position on earth.

It is desirable to provide timely vehicle location updates to the remote location.  
20       However, more frequent transmission than necessary increases cost and lowers communications channel capacity which may result in increased time necessary to receive the vehicle location data. Previously, the vehicle location has been transmitted to the remote location at preset intervals or upon request of the remote location. For example, the vehicle location may be sent at hourly intervals. Another method transmits the vehicle location whenever the vehicle  
25       changes direction. The problem with these triggering methods is that the transmission is not

triggered by any meaningful event, which may result in the vehicle location being transmitted too frequently or not frequently enough.

Vehicle location for services such as fleet management, emergency notification, autonomous vehicle location, etc. can therefore benefit greatly from transmission of the vehicle  
5 position triggered by a meaningful event, such as change in information.

### SUMMARY OF THE INVENTION AND ADVANTAGES

The present invention provides a navigation system that uses a method for transmitting the location of a vehicle to a location remote from the vehicle. The method  
10 includes determining a location of the vehicle relative to a road network defined as a first location, and determining a change in the location of the vehicle relative to the road network defined as a second location. The first location may be a first street while the second location is a second street different than the first street. The navigation system then communicates the location of the vehicle to the remote location when vehicle reaches the second location. In  
15 this manner, vehicle location may be communicated to the remote location based on the location of the vehicle.

In another aspect of the present invention, the method includes determining a location of the vehicle relative to a road network defined as a first location. A new location of the vehicle is determined relative to the road network and is defined as a second location. The  
20 first location of the vehicle is communicated to the remote location at a first frequency, and the second location of the vehicle is communicated to the remote location at a second frequency, which is different from the first frequency. In this manner, vehicle location information may be communicated to the remote location at different rates depending on the type of location.

Accordingly, the above provides transmission of the vehicle position triggered by a meaningful event thereby reducing cost and time necessary to receive the vehicle location data.

### BRIEF DESCRIPTION OF THE DRAWINGS

5 Other advantages of the present invention can be understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

Figure 1 is a schematic view of the vehicle navigation system of the present invention; and

10 Figure 2 is a front elevational view of the vehicle navigation system display unit.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The navigation system 20 of the present invention is shown schematically in Figure 1 installed in a vehicle 21. The navigation system 20 includes an Operator Interface Module ("OIM") 22 including input and output devices. The OIM 22 includes a display 24, 15 such as a high resolution LCD or flat panel display, and an audio speaker 26. The OIM 22 also includes input devices 28, preferably a plurality of buttons and directional keypad, but alternatively including a mouse, keyboard, keypad, remote device or microphone. Alternatively, the display 24 can be a touch screen display.

20 The navigation system 20 further includes a computer module 30 connected to the OIM 22. The computer module 30 includes a CPU 32 and storage device 34 connected to the CPU 32. The storage device 34 may include a hard drive, CD ROM, DVD, RAM, ROM or other optically readable storage, magnetic storage or integrated circuit. The storage device 34 contains a database 36 including a map of all the roads in the area to be traveled by the 25 vehicle 21 as well as the locations of potential destinations, such as addresses, hotels,

restaurants, or previously stored locations. The software for the CPU 32, including the graphical user interface, route guidance, operating system, position-determining software, etc may also be stored in storage device 34 or alternatively in ROM, RAM or flash memory.

The computer module 30 preferably includes navigation sensors, such as a GPS receiver 38 and an inertial sensor, which is preferably a multi-axis accelerometer 40. The computer module 30 may alternatively or additionally include one or more gyros 42, a compass 44, a wheel speed sensor 46 and altimeter 48, all connected to the CPU 32. Such position and motion determining devices (as well as others) are well known and are commercially available. The navigation system 20 propagates the position of the vehicle 21 relative to the map database 36, i.e. relative positions on road segments and intersections ("nodes"). The navigation system 20 also determines the current location of the vehicle 21 in terms of latitude and longitude. Utilizing any of a variety of known techniques, the position of the vehicle 21 relative to the map database 36 and/or in terms of latitude and longitude is determined at least in part based upon the motion signals from the multi-axis accelerometer 40. The current local time and date can be determined from the GPS signals received by the GPS receiver 38.

Generally, the CPU 32 and position and motion determining devices determine the position of the vehicle 21 relative to the database 36 of roads utilizing dead reckoning, map-matching, etc. Further, as is known in navigation systems, the user can select a destination relative to the database 36 of roads utilizing the input device 28 and the display 24. The navigation system 20 then calculates and displays a recommended route directing the driver of the vehicle 21 to the desired destination. Preferably, the navigation system 20 displays turn-by-turn instructions on display 24 and gives corresponding audible instructions on audio speaker 26, guiding the driver to the desired destination.

Figure 2 is a perspective view of one disclosed embodiment of the display device 24 and directional input device 77, preferably designed as an integral unit attached to the CPU by connection 25. The display device 24 includes a screen such as a high resolution LCD or flat panel display. The directional input device 77 includes a multiple of input buttons 78 including, preferably, an eight-way button shown generally at 80 and a selection key 86 such as an "Enter" key. Although an eight-way button is shown, it will be realized that other input devices, such as a joystick, mouse or roller ball can be employed.

The internal disk 82 is pivotally mounted in the eight-way button 80 and is capable of moving in the direction of any one of the directional arrows 84. Movement of the internal disk 82 in the direction of one of the directional arrows 84 transmits a directional signal.

The present invention transmits the location of the vehicle to the remote location when the name or other attribute of the street on which the vehicle is driving changes. For example, if the vehicle changes locations as explained in more detail below, a triggering device 89 may transmit vehicle location data. The navigation system 20 may be designed to transmit the data under different circumstances depending upon the particular application. The triggering device may be software on the CPU 32 or any other suitable apparatus.

Depending upon the application, it may be desirable for the triggering device to transmit data when a street address changes or when the vehicle arrives at a particular street address shown on the display 24 in Figure 2. One aspect of the invention is suppressing communication of the vehicle location when the road that the vehicle is travelling on will not provide significant information. For example, when the vehicle is travelling along a freeway and turns on a ramp to exit to a street, communication of data will be suppressed while the vehicle is travelling along the ramp because communicating vehicle location data while travelling along the ramp is unlikely to provide useful information.

In another embodiment, vehicle location data may be transmitted at a different rate when the street classification changes, e.g., from federal to state highway. Transmitting data with reference to the vehicle location relative to road information provides the remote location with data at a more desirable and meaningful frequency, as opposed to, for example, every ten  
5 minutes. For example, when travelling on a rural freeway the location data may be sent every 5 miles while for an urban freeway vehicle location data may be communicated every 1 mile. By way of further example, vehicle location data may be communicated every half mile for a major surface street while for a minor surface street it may be communicated every quarter mile. Additionally, frequency of communicating vehicle location data may also be varied depending  
10 upon how high or low the traffic area is, how dense or sparse the road network is, or it may be varied based upon the relative speed limits.

Preferably, the present invention is used with map matching to reduce the bandwidth and improve overall operation of the system. In operation, the navigation system 20 of the present invention determines the map-matched position of the vehicle 21 continuously. With  
15 reference to Figure 3, the navigation system 20 then transmits the map-matched position of the vehicle 21 to the remote location 50 via a communication tower or satellite 52 when the location of the vehicle changes. Transmission of the map-matched position requires little bandwidth and can be done on an 'as-needed' basis whereas the alternative of transmitting all the 'real-time' sensor data (acceleration, turn rate, etc.) would generally be impractical.

20 The position information transmitted by the navigation system 20 to the remote location 50 is preferably with reference to the map database 36, such as a street address, road segment, sub-segment, intersection or a distance and direction from a street address, road segment, sub-segment or intersection. If the remote location 50 includes the same map database 36, then the progress of the vehicle 21 can be monitored, such as on a display. If the remote location 50 is  
25 an emergency assistance dispatch station, then emergency assistance can be dispatched to the



vehicle location with reference to the road network, i.e. a street address, intersection or a distance and direction from a street address or intersection. As another alternative, or additionally, the remote location 50 could be another vehicle, which would include the CPU 32.

The navigation system 20 of the present invention provides more accurate position  
5 information to the remote location 50 because the position is calculated using map-matching. Further, the information is more useful and transmitted more efficiently, because it is given with reference to the map database 36 and consequently, with reference to the real world road network.

The invention has been described in an illustrative manner, and it is to be understood  
10 that the terminology that has been used is intended to be in the nature of words of description rather than of limitation. Obviously, many modifications and variations of the present invention are possible in light of the above teachings. It is, therefore, to be understood that within the scope of the appended claims the invention may be practiced otherwise than as specifically described.

## CLAIMS

What is claimed is:

1. A method for transmitting the location of a vehicle to a location remote from the vehicle comprising the steps of:

5 a) determining a location of the vehicle relative to a road network defined as a first location;

b) determining a change in the location of the vehicle relative to the road network defined as a second location; and

10 c) communicating the location of the vehicle to the remote location based upon said change in location.

2. The method of claim 1 wherein the location of the vehicle is communicated in said step b) with reference to the road network.

15 3. The method of claim 2 wherein the road network is in a map database.

4. The method of claim 3 wherein the location of the vehicle is determined in said step a) by map-matching.

20 5. The method of claim 1 wherein a third location is arranged between the first and second locations, and step c) includes communicating the first location at a first frequency, suppressing communication of the third location, and communicating the second location at a second frequency.

25 6. The method of claim 5 wherein the first and second frequencies are different.

7. The method of claim 1 wherein the first location is a first street and the second location is a second street.

5 8. The method of claim 1 wherein the first location is a first street address and the second location is a second street address.

9. An apparatus for a navigation system for transmitting the location of a vehicle to a location remote from the vehicle, the apparatus comprising:

10 at least one position determining device for providing a vehicle location signal;  
a database having a map database with a road network;  
a processor interconnected to said at least one positioning device and said database for determining the location of the vehicle relative to said map;

15 a transmitter for producing a transmission signal to the remote location having the location of the vehicle;

a trigger device for triggering said transmission signal, wherein said triggering device determines a location of the vehicle relative to said road network defined as a first location and determines a change in the location of the vehicle relative to said road network defined as a second location, and said trigger device commands said transmitter to produce said  
20 transmission signal based upon the change in location.

10. The apparatus of claim 9 wherein the location of the vehicle is communicated in with reference to said road network.

11. The apparatus of claim 10 wherein the location of the vehicle is determined by map-matching.

12. The apparatus of claim 9 wherein a third location is arranged between the first and second locations, and step c) includes communicating the first location at a first frequency, suppressing communication of the third location, and communicating the second location at a second frequency.

13. The apparatus of claim 12 wherein the first and second frequencies are different.

14. A method for transmitting the location to a location remote from the vehicle comprising the steps of:

a) determining a location of the vehicle relative to a road network defined as a first location;

b) determining a new location of the vehicle relative to the road network defined as a second location;

c) communicating the first location of the vehicle to the remote location at a first frequency; and

d) communicating the second location of the vehicle to the remote location at a second frequency different from the first frequency.

15. The method of claim 12 wherein the location of the vehicle is communicated in said step b) with reference to the road network.

16. The method of claim 13 wherein the road network is in a map database.

17. The method of claim 14 wherein the location of the vehicle is determined in said step a) by map-matching.

18. The method of claim 14 wherein the first location is a freeway and the second  
5 location is a residential street, wherein the first frequency is less than the second frequency.

19. The method of claim 14 wherein the first and second frequencies are based on a distance traveled by the vehicle.

20. The method of claim 14 wherein the first location is a high traffic road and the  
10 second location is a low traffic road, wherein the first frequency is less than the second frequency.

21. The method of claim 12 wherein the first location is part of a dense road network  
15 and the second location is part of a sparse road network wherein the first frequency is greater than the second frequency.

22. The method of claim 12 wherein the first and second locations have first and  
second speed limits, respectively, with the first speed limit being greater than the second speed  
20 limit, wherein the first frequency is less than the second frequency.

**A METHOD OF TRIGGERING THE TRANSMISSION OF DATA**  
**FROM A MOBILE ASSET**

**ABSTRACT OF THE DISCLOSURE**

5           A navigation system that uses a method for transmitting the location of a vehicle to a location remote from the vehicle is provided. The method includes determining a location of the vehicle relative to a road network defined as a first location, and determining a change in the location of the vehicle relative to the road network defined as a second location. The first location may be a first street while the second location is a second street different than the first street. The navigation system then communicates the location of the vehicle to the remote location when vehicle reaches the second location. In another aspect of the present invention, the method includes determining a location of the vehicle relative to a road network defined as a first location. A new location of the vehicle is determined relative to the road network and is defined as a second location. The first location of the vehicle is communicated to the remote location at a first frequency, and the second location of the vehicle is communicated to the remote location at a second frequency, which is different from the first frequency.

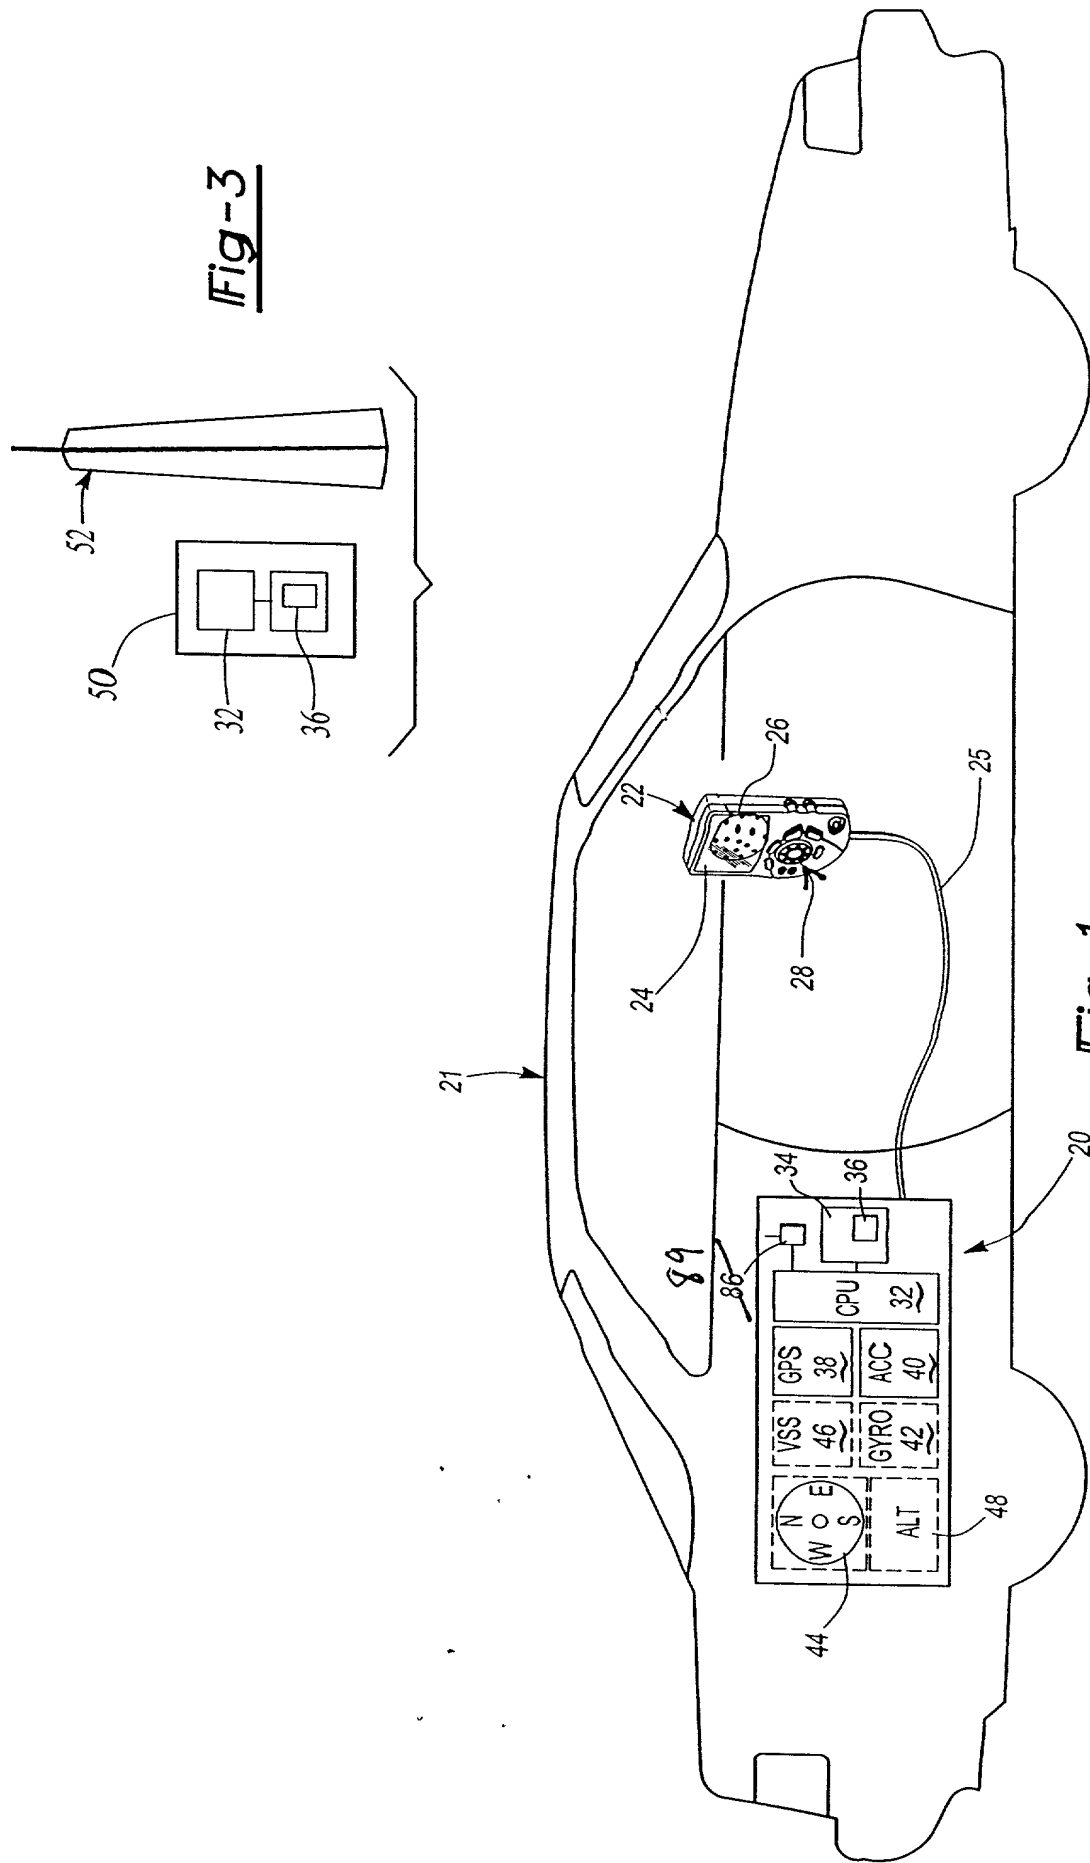


Fig-1

Fig-3





**COMBINED DECLARATION AND POWER OF ATTORNEY**  
**(Original Application - Sole Inventor No Priority Claimed)**

As the below named inventor, I hereby declare: that my residence, post office address and citizenship are as stated near my name below; that I believe I am the original, first and sole inventor of the subject matter of which is claimed and for which a patent is sought on the invention entitled

**A METHOD OF TRIGGERING THE TRANSMISSION OF DATA FROM A MOBILE ASSET**

which is described and claimed in the attached specification having the attorney docket number 60,314-098; that have reviewed and understand the contents of this specification, including the claims, as amended by any amendment referred to above; that I do not know and do not believe the same was ever known or used in the United States of America before my invention thereof or patented or described in any printed publication, in any country before my invention thereof for more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application; that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve (12) months prior to this application; that I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a); and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns except as follows: NONE.

I hereby appoint:

Raymond E. Scott	22,981	William H. Honaker	31,623
Theodore W. Olds	33,080	John E. Carlson	37,794
Harold W. Milton, Jr.	22,180	David J. Gaskey	37,139
Jeffrey A. Sadowski	29,005	Kerrie A. Laba	42,777
Samuel J. Haidle	42,619	Randall L. Shoemaker	43,118
William Gottschalk	44,130	David LaPrairie	46,295
Kevin MacKenzie	45,639	David Wisz	46,350
Bharat Gandhi	35,146	John M. Siragusa	46,174

as my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith. Please address all correspondence and telephone calls to:

**JOHN E. CARLSON, ESQ.**  
**HOWARD & HOWARD**  
**39400 North Woodward Avenue, Suite 101**  
**Bloomfield Hills, Michigan 48304-5151**  
**(248) 645-1483**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

6/9/00  
Date

Carl W. Shonk  
Name: Carl W. Shonk

Address: 9765 S. Meridian  
Shepherd, MI 48883

Post Office Address: Same

Citizenship: United States of America

Margaret M. Diskin  
Notary Public

**MARGARET M. DISKIN**  
Notary Public, Oakland County, MI  
My Commission Expires Aug. 5, 2001

0011250 2256560